
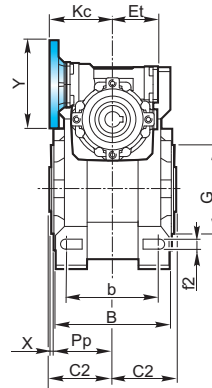


5.5 Dimensioni



5.5 Dimensions

5.5 Abmessungen


KXC

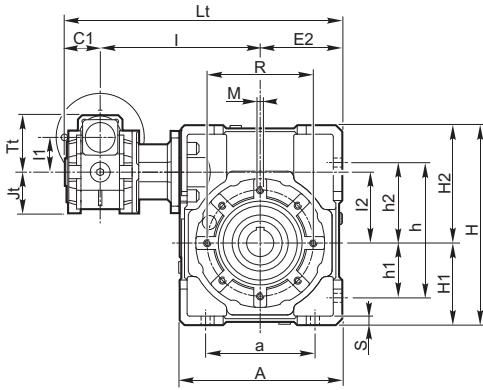



XXA

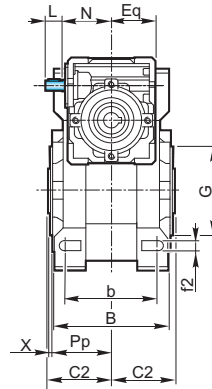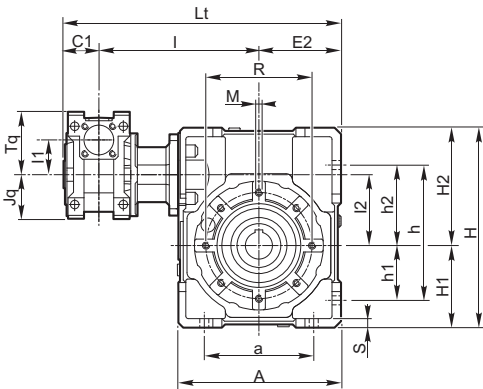


Albero entrata  
Input shaft  
Antriebswelle





XXF

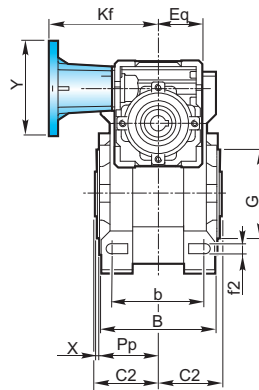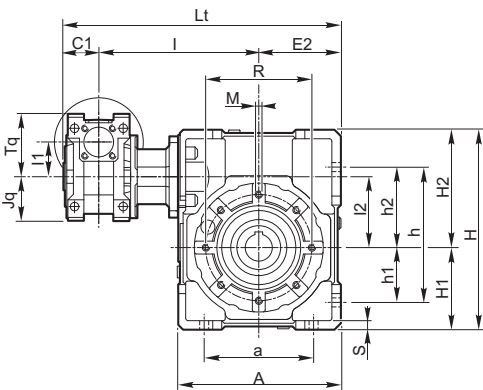

Albero uscita cavo  
Output hollow shaft  
Abtriebshohlwelle



XXC

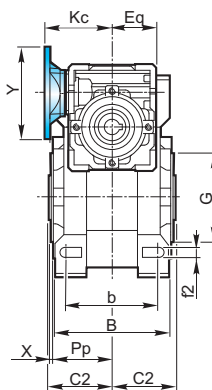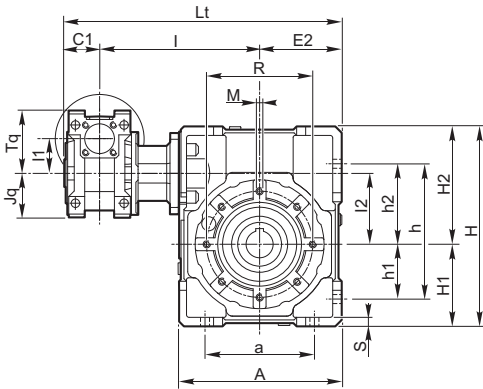


5.5 Dimensioni


5.5 Dimensions

5.5 Abmessungen


Flangia pendolare / Shaft-mounted flange / Aufsteckflansch

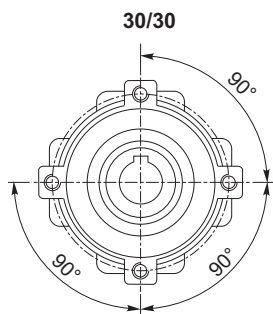

4 Fori / Holes / Bohrungen

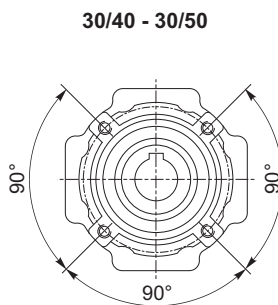


4 Fori / Holes / Bohrungen

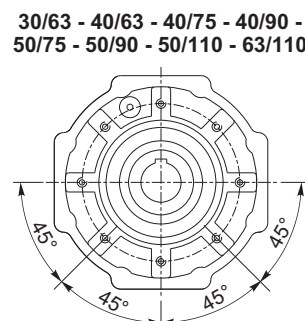

8 Fori / Holes / Bohrungen

	KXC - XXC - XXF - XXA																							
	a	A	b	be	b <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>	de	D <sub>2</sub> H7	Et	Eq	E <sub>2</sub>	f <sub>2</sub>	G <sub>h8</sub>	h	h <sub>1</sub>	h <sub>2</sub>	H	H <sub>1</sub>	H <sub>2</sub>			
30/30	54	80	44	3	5	—	56	31.5	31.5	14	—	41	40	40	6.5	55	71	27	44	97	40	57		
30/40	70	105	60		6	6	71		39	18	19			19	24	50	6.5	60	90	35	55	125	50	75
30/50	80	125	70		8	8	85		46	9	25					24	60	8.5	70	104	40	64	150	60
30/63 40/63	100	147	85	4	8	—	103	39	56	11	—	51	50	72	9	80	130	50	80	182	72	110		
40/75 50/75	120	176	90		8	—	112		46					60	14	28	—	60	60	86	11	95	153	60
40/90 50/90	140	203	100	4	10	—	130	39	70	11	—	51	50	103	13	110	172	70	102	248.5	103	145.5		
50/110 63/110	170	252.5	115	5	12	—	143	46	14	14	—	60	60	127.5	14	130	210	85	125	310.5	127.5	183		
				6	56	77.5	19	42	—	71	72													

	KXC - XXC - XXF - XXA																				
	l	l <sub>1</sub>	l <sub>2</sub>	Jt	Jq	K <sub>c</sub>	K <sub>q</sub>	L	L <sub>t</sub>	M	Me	N	P <sub>p</sub>	R	S	Tt	Tq	Te	t <sub>2</sub>	X	
30/30	100	31.5	31.5	37.5	40	57	57	15	171.5	M6x8	M4x10	44.5	29	65	5.5	52.5	57	10.2	16.3	—	1.5
30/40	122		40						203.5	M6x10			36.5	75	6				20.8	21.8	1.5
30/50	132		50						223.5	M8x10			43.5	85	7				27.3	1.5	
30/63 40/63	145 150	40	63	43.5	50	75	75	20	248.5	M8x14	M4x12	57.5	53	95	8	68.5	75	12.5	28.3	—	2
40/75 50/75	174.5 190		75						261	M8x14			57	115	10				31.3	—	2
40/90 50/90	184.5 200	50	90	53.5	60	82	82	25	322	M5x13	67.5	57	130	12	82.5	90	16	38.3	—	2	
50/110 63/110	226 236		110	326.5	M10x18	67	165	14	82.5	90	16	45.3	—	2.5							
			349	M5x13	74	165	14	82.5	90	16	45.3	—	2.5								
			399.5	M8x20	74	165	14	100.5	110	21.5	45.3	—	2.5								
			419.5	M8x20	77.5	165	14	100.5	110	21.5	45.3	—	2.5								





5.5 Dimensioni



5.5 Dimensions

5.5 Abmessungen



KKC\_A

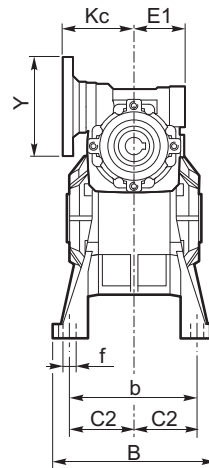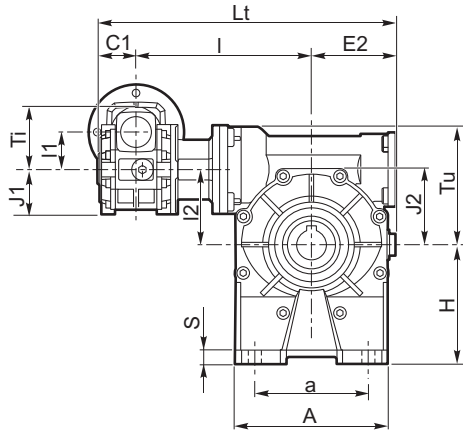




KKC\_B

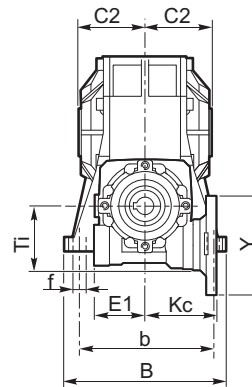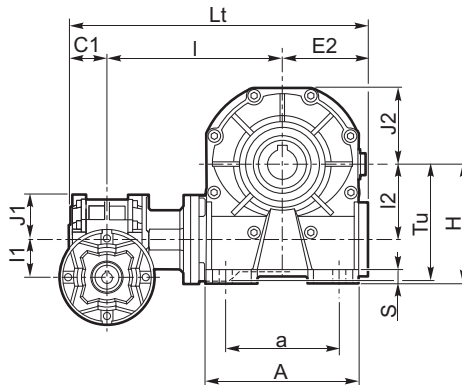

KKC\_V

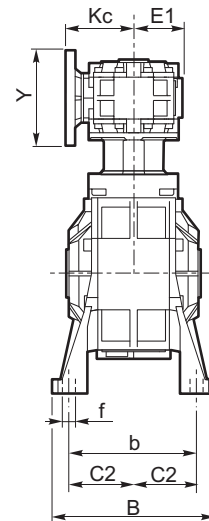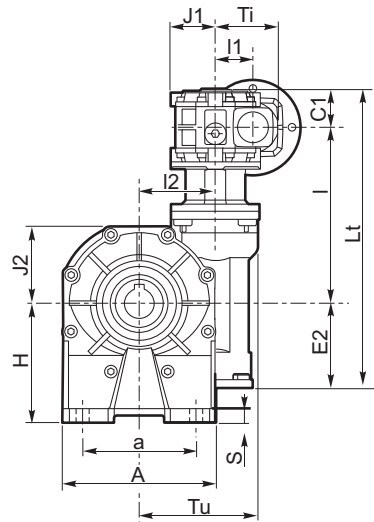

KKC\_P

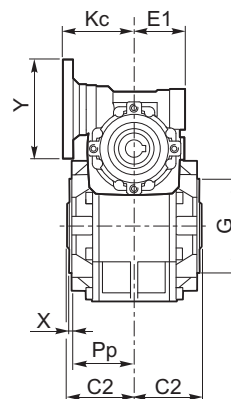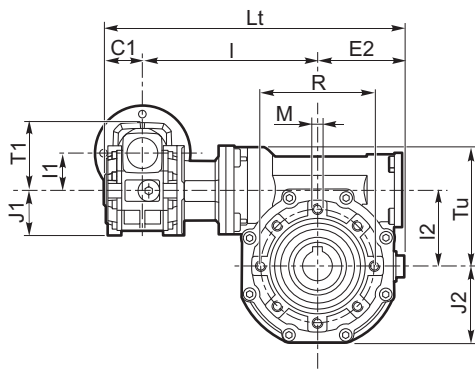


Albero uscita cavo  
Output hollow shaft  
Abtriebs-Hohlwelle

5.5 **Dimensioni**


5.5 **Dimensions**

5.5 **Abmessungen**


Flangia pendolare / Shaft-mounted flange / Aufsteckflansch

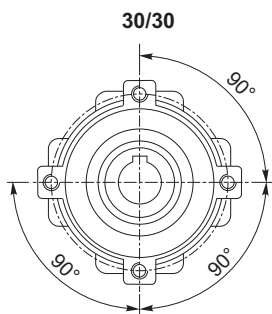

4 Fori / Holes / Bohrungen

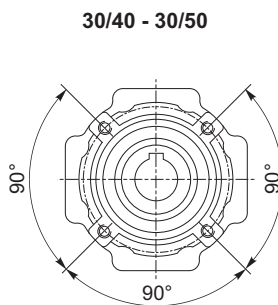


4 Fori / Holes / Bohrungen

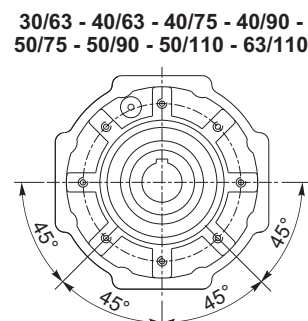

8 Fori / Holes / Bohrungen

	KKC																							
	A		a		B		b		f		H		S		b <sub>2</sub>	C <sub>1</sub>	C <sub>2</sub>	D <sub>2</sub> H7	E <sub>1</sub>	E <sub>2</sub>	G <sub>h8</sub>			
	1	2	1	2	1	2	1	2	1	2	1	2	1	2										
30/30	67		40-52		78		66		6.5		52	55	5	8	5	—	31.5	14	—	41	55			
30/40	86.5		70	52	98		84	81	7	8.5	71	72	6	6	6	31.5	39	18	19	41	51	60		
30/50	106		63-85		119		99		9		85	82	8	8	8	31.5	46	—	24	41	60	70		
30/63	127.5	95	136	111	11	100	12	8	—	8	—	39	56	25	—	51	71	80	—	—	—	—		
40/63																								
40/75	155.5	120	140	115	11	115	12	8	—	46	60	28	—	60	85	95	60	85	95	—	—	—	—	
50/75																								
40/90	190	140	168	140	146	13	11	135	142	14	10	—	39	70	35	—	51	103	110	—	—	—	—	
50/90																								
50/110	250	200	210	162	181	13	13	171	170	17	15	12	—	46	77.5	42	—	60	127.5	130	—	—	—	—
63/110																								


	KKC														
	I	I <sub>1</sub>	I <sub>2</sub>	J <sub>1</sub>	J <sub>2</sub>	K <sub>c</sub>	L <sub>t</sub>	M	P <sub>p</sub>	R	T <sub>i</sub>	T <sub>u</sub>	t <sub>2</sub>	X	
30/30	100	31.5	31.5	37.5	37.5	57	171.5	M6x8	29	65	52.5	52.5	16.3	—	1.5
30/40	122		40		43.5		203.5	M6x10	36.5	75		68.5	20.8	21.8	1.5
30/50	132		50		53.5		223.5	M8x10	43.5	85		82.5	27.3	1.5	
30/63	145	40	63	43.5	64	75	248.5	M8x14	53	95	68.5	100.5	28.3	—	2
40/63	150						261								
40/75	176.5	50	75	53.5	78	82	301.5	M8x14	57	115	82.5	116.5	31.3	—	2
50/75	192						324								
40/90	186.5	40	90	43.5	100	75	328.5	M10x18	67	130	68.5	131.5	38.3	—	2
50/90	202						351								
50/110	226	50	110	53.5	122	82	399.5	M8x20	74	165	82.5	161.5	45.3	—	2.5
63/110	236						419.5								

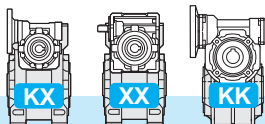

Flangia uscita


Output flange

Abtriebsflansch

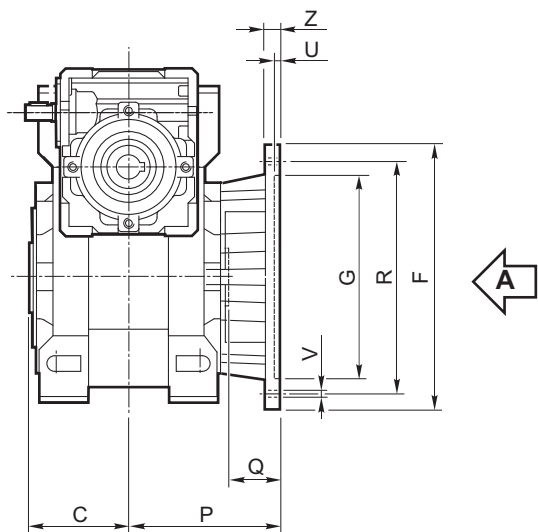



Vista da A / View from A / Ansicht von A

30/30
F1
—
—



30/30



30/40	30/50
F1	F1
F2	—
—	—



30/40	30/50
—	—
—	F2
F3	—

30/40 - 30/50



30/63	40/75
40/63	50/75
F1	F1
F2	—
—	—



30/63	40/75
40/63	50/75
—	—
—	F2
F3	—


30/63 - 40/63 - 40/75 - 50/75

40/90	50/110
50/90	63/110
—	F1
—	—
—	—



40/90	50/110
50/90	63/110
F1	—
F2	F2
F3	—

40/90 - 50/90 - 50/110 - 63/110

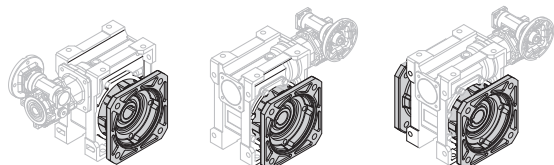

F.D Standard

F.S

F.2


KX XX KK	Tipo Type Typ	C	F		G H8	P	Q	R	U	V			Z
												Ø	
30/30	F1	31.5		66	50	54.5	23	68	4			6.5	6
	F2												
	F3												
30/40	F1	39		85	60	67	28	75-90	4			9	8
	F2			85	60	97	58	75-90	4			9	8
	F3			140	95	80	41	115	5			9	10
30/50	F1	46		94	70	90	44	85-95	5			11	10
	F2			160	110	89	43	130	5			11	11
	F3												
30/63 40/63	F1	56		142	115	82	26	150	5			11	11
	F2			142	115	112	56	150	5			11	11
	F3			160	110	80.5	24.5	130	5			11	12
40/75 50/75	F1	60		160	130	111	51	165	5			13	12
	F2			160	110	90	30	130	6			11	13
	F3												
40/90 50/90	F1	70		200	152	111	41	175	5			13	12
	F2			200	152	151	81	175	5			13	13
	F3			200	130	110	40	165	6			11	11
50/110 63/110	F1	77.5		260	170	131	53.5	230	6			13	15
	F2			250	180	150	72.5	215	5			15	16
	F3												

5.5 Dimensioni


5.5 Dimensions

5.5 Abmessungen


Flangia entrata / Input flange / Antriebsflansch

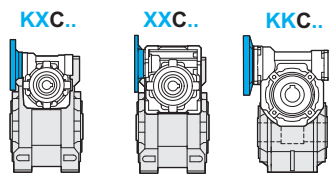

PM = 1



PM = 2

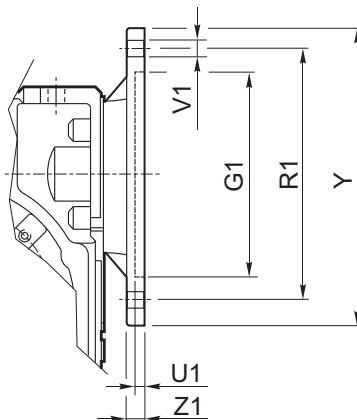

KXC XXC KKC	IEC	G <sub>1</sub> H7	PM		R <sub>1</sub>	U <sub>1</sub>	V <sub>1</sub>			Y	Z <sub>1</sub>	Diametro fori PAM / Holes diameter IEC Bohrungsdurchmesser IEC												
			1	2								150 200 300	450	600	900	1200	1500 2500	1950 3250	4000	5000 10000				
30/30 30/40 30/50 30/63	56 B5	80	•	•	100	4	7		8		120	8	9	9	9	9	9	9	9	9	9	9	9	9
	56 B14	50		•	65	3.5	6			4	80	8	9	9	9	9	9	9	9	9	9	9	9	9
	63 B5	95	•	•	115	4	9		8		140	8	11	11	11	11	11	11	11	11	11	/	/	/
	63 B14	60	•	•	75	4	6		8		90	8	11	11	11	11	11	11	11	11	11	/	/	/
40/63 40/75 40/90	56 B5	80	•	•	100	4	7		8		120	9	/	/	/	/	/	/	/	9	9	9	9	9
	56 B14	50		•	65	3.5	6			4	80	8	/	/	/	/	/	/	/	9	9	9	9	9
	63 B5	95	•	•	115	4	9		8		140	9	11	11	11	11	11	11	11	11	11	11	11	11
	63 B14	60		•	75	3.5	6			4	90	8	11	11	11	11	11	11	11	11	11	11	11	11
	71 B5	110	•	•	130	4.5	9		8		160	10	14	14	14	14	14	14	14	/	/	/	/	/
	71 B14	70		•	85	3.5	7			4	105	8	14	14	14	14	14	14	14	/	/	/	/	/
50/75 50/90 50/110	63 B5	95	•	•	115	4	9		8		140	9	/	/	/	/	/	/	/	11	11	11	11	11
	63 B14	60		•	75	3.5	6			4	90	8	/	/	/	/	/	/	/	11	11	11	11	11
	71 B5	110	•	•	130	4.5	9		8		160	10	14	14	14	14	14	14	14	14	14	14	14	14
	71 B14	70		•	85	3.5	7			4	105	8	14	14	14	14	14	14	14	14	14	14	14	14
	80 B5	130	•	•	165	4.5	11		8		200	10	19	19	19	19	19	19	19	/	/	/	/	/
	80 B14	80	•	•	100	4	7		8		120	10	19	19	19	19	19	19	19	/	/	/	/	/
63/110	71 B5	110	•	•	130	4.5	9		8		160	10	/	/	/	/	/	/	/	14	14	14	14	14
	71 B14	70		•	85	3.5	7			4	105	10	/	/	/	/	/	/	/	14	14	14	14	14
	80 B5	130	•	•	165	4.5	11		8		200	10	19	19	19	19	19	19	19	19	19	19	19	19
	80 B14	80		•	100	4	7			4	120	10	19	19	19	19	19	19	19	19	19	19	19	19
	90 B5	130	•	•	165	4.5	11		8		200	10	24	24	24	24	24	24	24	/	/	/	/	/
	90 B14	95	•	•	115	4	8.5		8		140	10	24	24	24	24	24	24	24	/	/	/	/	/

\* Speciale

\* Special

\*Sonderausführung

N.B.: E' possibile realizzare anche tutte le composizioni ibride ottenibili dalle flange esistenti.

N.B.: it is possible to create hybrid combinations with the existing flanges.

Anmerkung: Mischkombinationen sind mit den bestehenden Flanschen möglich.




5.5 Dimensioni

5.5 Dimensions


5.5 Abmessungen

Flangia entrata / Input flange / Antriebsflansch


XXF..



PM = 1



PM = 2

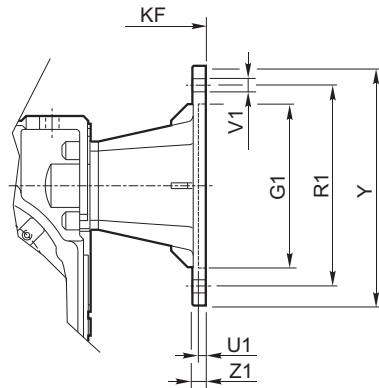

XXF	IEC	PM		G <sub>1</sub> H7	K <sub>F</sub>	R <sub>1</sub>	U <sub>1</sub>	V <sub>1</sub>			Y	Z <sub>1</sub>	
		1	2										
30/30 30/40 30/50 30/63	56 B5	•	•	80	82.5	100	3.5	7		8		120	8
	56 B14		•	50	82.5	65	3.5	6			4	80	8
	63 B5	•	•	95	85.5	115	4	9		8		140	10
	63 B14	•	•	60	85.5	75	3.5	6		8		90	8
40/63 40/75 40/90	56 B5	•	•	80	101.5	100	3.5	7		8		120	8
	63 B5	•	•	95	104.5	115	4	9		8		140	10
	63 B14	•	•	60	104.5	75	3.5	6		8		90	8
	71 B5	•	•	110	111.5	130	4.5	9		8		160	10
	71 B14	•	•	70	111.5	85	4	7		8		105	10
50/75 50/90 50/110	63 B5	•	•	95	119.5	115	4	9		8		140	10
	71 B5	•	•	110	126.5	130	4.5	9		8		160	10
	71 B14		•	70	126.5	85	3.5	7			4	105	10
	80 B5	•	•	130	136.5	165	4.5	11		8		200	10
	80 B14	•	•	80	136.5	100	4	7		8		120	10
63/110	71 B5	•	•	110	141.5	130	4.5	9		8		160	10
	80/90 B5	•	•	130	161.5	165	4.5	11		8		200	10
	80 B14	•	•	80	151.5	100	4	7		8		120	10
	90 B14	•	•	95	161.5	115	4	9		8		140	10